

# RF0244 • RF0266 Flake Ice Machines



Model RF0244A  
Flake Ice Machine



Model RF0266A  
Flake Ice Machine



- Up to 182 lbs. (83 kgs.) daily flake ice production.
- Up to 60 lbs. (27 kgs.) ice storage capacity.
- High load capacity bearings for enhanced reliability.
- Heavy duty stainless steel cabinet resists corrosion.
- Easy access door, slides up & out of the way.

#### Warranty

- 3-year Parts
- 2-year Labor
- Compressor parts for 5 years and labor for 2 years.



ISO 9001:2000  
Quality System  
Certified

**America's #1 Selling Ice Machine**

Ice Cube & Flake Machines • Ice Storage Bins • Ice Dispensers



# Manitowoc RF0244 • RF0266 Flake Ice Machines

	Model	Ice Shape	Ice Production 24 Hrs.		Power kWh/ 100 lbs./ 90°/70°F	Potable Water Usage (100 lbs./ 45.4 kgs. of Ice)	Bin Storage Capacity
			70° Air / 50°F Water	90° Air / 70°F Water			
AIR-COOLED	RF0244A	Flake	182 lbs.	150 lbs.	7.86	12 Gal.	40 lbs.
			83 kgs.	68 kgs.		45.4 L	18 kgs.
	RF0266A	Flake	182 lbs.	150 lbs.	7.86	12 Gal.	60 lbs.
			83 kgs.	68 kgs.		45.4 L	27 kgs.

\*"A" following model number indicates "Air" condensing unit.

## Ice Machine Electric

\*115/60/1. (230/50/1 also available.)

115/60/1 ice machines are factory pre-wired with a 6' (180 cm) power cord and NEMA 5-15P plug configuration.

\*230/50/1 ice machines are factory pre-wired with a 6' (180 cm) power cord with either: no plug or prewired with Schuko or Blade "G Type" Plugs.

**Total ampacity:** Air-cooled: 7.5 amps.

**Maximum fuse size:** Air-cooled: 15 amps.

HACR-type circuit breakers can be used in place of fuses.

## Specifications

### BTU Per Hour:

2,400 (average)

### Compressor:

Nominal rating: 1/4 HP

Refrigerant: R-404A

### Operating Limits:

- Ambient Temperature Range: 50°-110°F (10°-43°C)
- Water Temperature Range: 37°-90°F (3°-32°C)
- Water Pressure Ice Maker Water In: Min. 14 psi (96.5 kPa) Max. 80 psi (551.6 kPa)




## Standard Equipment

### RF0244A / RF0266A

Ice Scoop, 6" Bin Legs, Alternate Low Profile Legs  
Standard Legs Adjustable from 4-1/2" to 6"  
Low Profile Non-Adjustable 1/4"

## Air Flow Overhead View



Air in front,  
air out  
back, no  
side vents.

## Space-Saving Designs




	RF0244	RF0266
Height	33.17" 84.24 cm	37.50" 95.24 cm
Width	19.69" 50.00 cm	19.69" 50.00 cm
Depth	25.98" 66.00 cm	25.98" 66.00 cm
Bin Storage	40 lbs. 18 kgs.	60 lbs. 27 kgs.

Height includes adjustable bin legs 4.50" to 6.00", (11.43 cm to 15.24 cm) set at 6.00" (15.24 cm).


## Ice Shape

Flake ice is small hard bits of ice ideally suited for presentation applications.



Ice shown actual size

## RF0244/RF0266

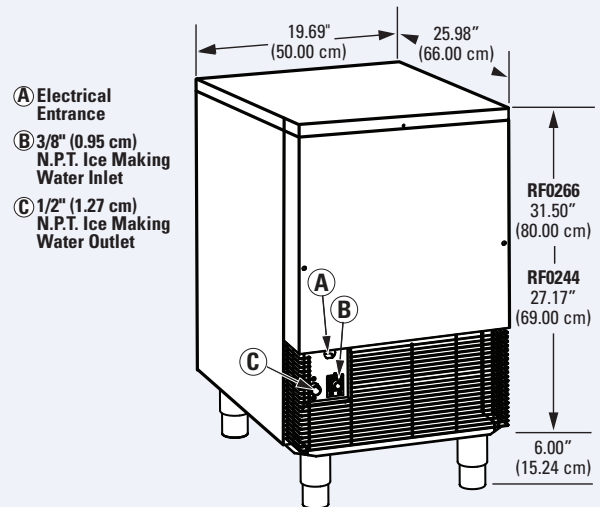

**Installation Note** - Minimum installation clearance:  
Top/sides: 8" (20.32 cm), back: 5" (12.70 cm).

©2019 Manitowoc 9/19 Continuing product improvement may necessitate change of specifications without notice. 4539A



We are committed to protecting the environment and its resources. For up-to-date product data always view an electronic version on our web site.



MANITOWOC ICE  
2110 South 26th Street, P.O. Box 1720  
Manitowoc, WI 54221-1720, USA  
Ph: 920-682-0161 • Fax: 920-683-7589  
Visit us online at [www.manitowocice.com](http://www.manitowocice.com)

